







## **APPLICATIONS:**

Indoor
Natural Gas
LP (Liquid Propane)
Single B-Vent Chimney with Draft Diverter
Isoflames XL Linear Burner
Glass Media
Electronic Ignition System
X-Ventiso Meridian Fan System

## Redefining Bold – The Future of Advanced Fireplace Design

We combined the beauty of superior design with advanced technology. You don't have to comprise between larger opening height, exceptional flame presentation, or the flexibility to fit your lifestyle.

Available with up to 200K BTUs, the new Isoflames XL Burner features our patented interlocking design, ensuring a seamless, low-profile foundation for superior flame presentation. Finish the look with our captivating fireglass or lava pebbles.

Xcelux is powered by the advanced X-Ventiso Meridian Fan and Control System, with a remote-controlled Electronic Ignition. Xcelux provides an integrated, ultra-quiet, and sophisticated fireplace experience.


<sup>\*</sup> Refer to the appropriate and approved Installation Manuals for specifications and requirements for all applications.

## Open Front - 48, 60, 72, 96 & 120

Please Note: This unit utilizes a single 12" B-vent Chimney that can be terminated vertically or horizontally. All units are power vented. Models 60, 72, 96, and 120 require 6"x 6"x 1/2" Steel Angle Cut to span the firebox opening. This item is not included in the components and can be sourced locally.

Unit can only be installed on combustible floors using the combustible floor installation methods detailed in installation manual. Noncombustible hearth extensions required.

	Framing & Weight	
Model	Minimum Framing	Weight
48	56"W x 71"H x 29 1/2"D	1645 lbs
60	77"W x 71"H x 29 1/2"D	2115 lbs
72	89"W x 71"H x 29 1/2"D	2420 lbs
96	112"W x 71"H x 29 1/2"D	3000 lbs
120	135"W x 71"H x 29 1/2"D	3550 lbs

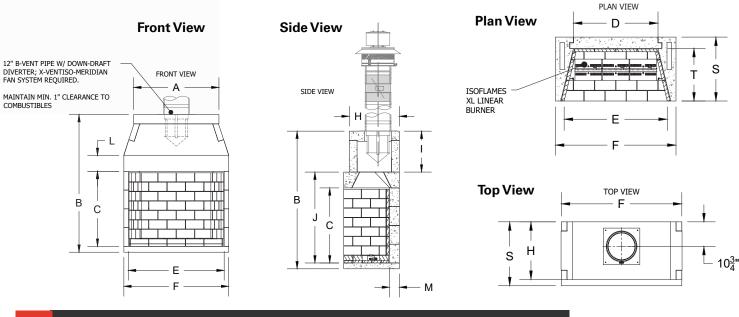

Model	А	В	С	E	F	L	М
48	43"	69 5/16"	37 3/4"	48 1/2"	52 3/4"	8"	5"
60	63 3/16"	69 5/16"	37 1/4"	68 5/16"	73 1/2"	8"	5"
72	76"	69 5/16"	37 1/4"	81 1/4"	85 13/16"	8"	5"
96	98 1/8"	69 5/16"	37 1/4"	103 5/8"	109"	8"	5"
120	121 5/8"	69 5/16"	37 1/4"	127 1/8"	132"	8"	5"
	48 60 72 96	60 63 3/16" 72 76" 96 98 1/8"	48 43" 69 5/16" 60 63 3/16" 69 5/16" 72 76" 69 5/16" 96 98 1/8" 69 5/16"	48 43" 69 5/16" 37 3/4" 60 63 3/16" 69 5/16" 37 1/4" 72 76" 69 5/16" 37 1/4" 96 98 1/8" 69 5/16" 37 1/4"	48 43" 69 5/16" 37 3/4" 48 1/2" 60 63 3/16" 69 5/16" 37 1/4" 68 5/16" 72 76" 69 5/16" 37 1/4" 81 1/4" 96 98 1/8" 69 5/16" 37 1/4" 103 5/8"	48 43" 69 5/16" 37 3/4" 48 1/2" 52 3/4" 60 63 3/16" 69 5/16" 37 1/4" 68 5/16" 73 1/2" 72 76" 69 5/16" 37 1/4" 81 1/4" 85 13/16" 96 98 1/8" 69 5/16" 37 1/4" 103 5/8" 109"	48       43"       69 5/16"       37 3/4"       48 1/2"       52 3/4"       8"         60       63 3/16"       69 5/16"       37 1/4"       68 5/16"       73 1/2"       8"         72       76"       69 5/16"       37 1/4"       81 1/4"       85 13/16"       8"         96       98 1/8"       69 5/16"       37 1/4"       103 5/8"       109"       8"

Please Note: \*HEIGHT MAY BE REDUCED BY 9-1/2" BY REMOVAL OF ONE COURSE OF BACKWALLS AND SIDEWALLS

	Model	В	С	Н	1	J	M
Ŋ	48	69 5/16"	37 3/4"	25 1/4"	20 5/8"	45 11/16"	5"
View	60	69 5/16"	37 1/4"	25 1/4"	20 5/8"	45 11/16"	5"
<u>e</u>	72	69 5/16"	37 1/4"	25 1/4"	20 5/8"	45 11/16"	5"
Side	96	69 5/16"	37 1/4"	25 1/4"	20 5/8"	45 11/16"	5"
	120	69 5/16"	37 1/4"	25 1/4"	20 5/8"	45 11/16"	5"


	Mode	el D	Е	F	S	T
View	48	37 1/4"	48 1/2"	52 3/4"	28"	23"
Vie.	60	57 11/16"	68 15/16"	73 1/2"	28"	23"
ı E	72	70 1/16"	81 1/4"	85 13/16"	28"	23"
Plan	96	92 1/2"	103 5/8"	109"	28"	23"
	120	116"	127 1/8"	132"	28"	23"


## See-Thru - 48, 60, 72, 96 & 120


Please Note: This unit utilizes a single 12" B-vent chimney that can be terminated vertically or horizontally. All units are power vented. Models 60, 72, 96, and 120 require two 6"x 6"x 1/2" steel angle cut to span the firebox opening. These items are not included in the components and can be sourced locally.

Unit can only be installed on combustible floors using the combustible floor installation methods detailed in installation manual. Noncombustible hearth extensions required.

	Framing & Weight	
Model	Minimum Framing	Weight
48	56"W x 61 1/2"H x 28"D	1240 lbs
60	77"W x 61 1/2"H x 28"D	1725 lbs
72	89"W x 61 1/2"H x 28"D	1910 lbs
96	112"W x 61 1/2"H x 28"D	2380 lbs
120	135"W x 61 1/2"H x 28"D	2815 lbs







Top View	-	TOP VIEW	-	ļ
S H				103"

	Model	А	В	С	Е	F	L
View	48	43"	59 7/8"	28 5/16"	42 7/8"	52 3/4"	8"
Ş	60	63 3/16"	59 7/8"	27 13/16"	63 5/8"	73 1/2"	8"
nt	72	76''	59 7/8"	27 13/16"	75 15/16"	85 13/16"	8"
Front	96	98 1/8"	59 7/8'''	27 13/16"	99 1/8"	109"	8"
	120	121 5/8"	59 7/8"	27 13/16"	122 1/8"	132"	8"

	Model	В	С	Н	- 1	J
×	48	59 7/8"	28 5/16"	25 1/4"	20 5/8"	36 5/16"
View	60	59 7/8"	27 13/16"	25 1/4"	20 5/8"	36 5/16"
<u>e</u>	72	59 7/8"	27 13/16"	25 1/4"	20 5/8"	36 5/16"
Side	96	59 7/8'''	27 13/16"	25 1/4"	20 5/8"	36 5/16"
	120	59 7/8"	27 13/16"	25 1/4"	20 5/8"	36 5/16"

10 Office Locations
Over 500 Dealers

	Model	Е	F	S
M	48	42 7/8"	52 3/4"	28"
View	60	63 5/8"	73 1/2"	28"
Ę	72	75 15/16"	85 13/16"	28"
Plan	96	99 1/8"	109"	28"
	120	122 1/8"	132"	28"

1.800.642.2920 EARTHCORE.COM