



ISOMETRIC VIEW SCALE: N.T.S

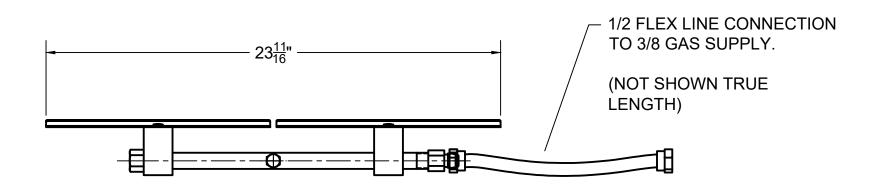

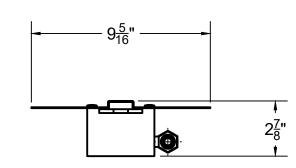

FRONT VIEW RIGHT-SIDE VIEW

GENERAL NOTES:

- 1. ISOFLAMES LINEAR BURNERS ARE TESTED/ LISTED TO ANSI Z21.60 (PFS REPORT NO. F19-161).
- 2. THE ISF24LBP BURNER IS DESIGNED ONLY FOR USAGE WITH PROPANE AND MUST ONLY BE INSTALLED WITH THE E-VKP GAS VALVE SYSTEM. THIS VALVE SYSTEM COMES IN A 12" x 12" x 4" NEMA 1 ENCLOSURE AND MUST BE INSTALLED WITHIN 7' OF FIREPLACE. VALVE SYSTEM REQUIRES 120 VAC.
- 3. GAS TYPE IS AS INDICATED ON RATING PLATE. DO NOT USE NATURAL GAS BURNER WITH PROPANE, OR A PROPANE BURNER WITH NATURAL GAS. APPLIANCE IS NOT FIELD CONVERTIBLE FOR USE WITH OTHER GASES.
- 4. DRAWINGS ARE FOR DESIGN PURPOSES ONLY AND ARE THE SOLE PROPERTY OF EARTHCORE INDUSTRIES. ANY REPRODUCTION OR UNAUTHORIZED USE IS STRICTLY PROHIBITED. EARTHCORE/ ISOKERN OR ANY DIVISION THEREOF SHALL NOT BE HELD LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES OR EXPENSES ARISING OUT OF THE USE OF THEIR BURNERS. FIREPLACES OR CHIMNEY SYSTEMS.

	ISOFLAMES LINEAR BURNER (LP): LISTED ANSI Z21.60										
	BTU		PRESSURE: W.C.			MIN FIREPLACE DIMS (in)					
PART NUMBER	MAX	MIN	INLET MAX	INLET MIN	MANIFOLD	DEPTH	HEIGHT	REAR WIDTH	FRONT WIDTH	CHIMNEY OPENING SQ IN	
ISF24LBP	32K	24K	14	11	10 - 6.4	17.5	16	25	36	22	



	17	11	10 0.4						
	UNLESS OTHERWIS DIMENSIONS AR	SE STATED, ALL	PROJECT: ISOFI	AMES	24" LI	NEAR E	BURNER	R (LP	')
	UNSPECIFIED TOLERANCES	THIRD ANGLE PROJECTION	DESCRIPTION: OVERALL	DIMENSION	IS/ SPECII	FICATION		•	
╙	NG. X ±		MATERIAL: VARIES						
Ш	LIN. X ±](4)	DRAWN:	DATE:		SCALE:	DRAWING #:		REV:
	.XX ±	$ \Psi \cup $	K.B.H APPROVED:	5/1/2025 DATE:	- A	1:5	ISF24LBP-	SPEC	
╝	.XXX ±				" ` [DO NOT SCALE	SHEET# 1	OF	1