


# Rough Framing Dimensions TYPICAL INSTALLATION

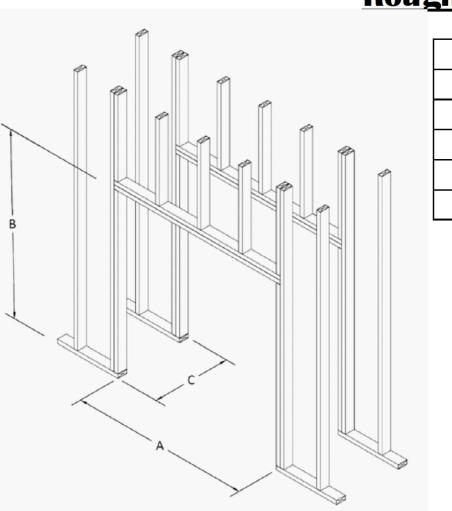


TYPICAL INSTALLATION FRAMING DIMENSIONS				
	Model#	<b>A</b> - Width	<b>B</b> - Height	<b>C</b> - Depth
	82L48ST	56"	64-1/2"	28"
	82L72ST	89"	64-1/2"	28"
	82L96ST	112"	64-1/2"	28"
	82L120ST	135"	64-1/2"	28"

### NOTES:

- 1) "B" includes the required 3" thick base plate.
- 2) If the Maximus Linear See-thru installation is to be elevated, this "Raised hearth" installation will require additional rough opening height at "B" that is equal to the height of the raised hearth.

**IMPORTANT:** Unless the insulation on walls at sides of firebox is installed behind plywood sheathing, the walls must be framed to account for the required 3" clearance to insulation. Even at this distance, the installer should be aware that usage of spray foam insulation may expand past the face of the stud wall and will require trimming prior to firebox installation to maintain the required 3" clearance. It is important that any insulation that is not installed behind sheathing shall be installed in such a manner that it cannot fall on the firebox and encroach on this clearance.

### Firebrick Installation - Maximus Linear See-Thru with Glass-Front

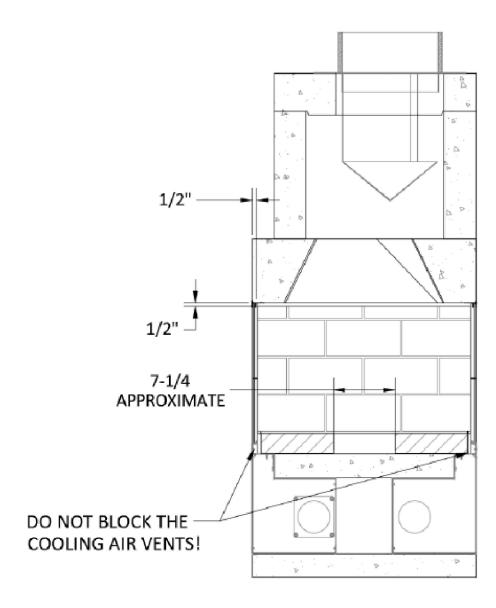

1) Lay two courses of "full" sized firebrick so that the leading edge of the coursing begins at the Brick Barrier that is affixed to the Air Collector Box (s). Ensure a gap of approximately ½" is kept between firebrick and sidewall to allow for expansion.


IMPORTANT: The Brick Barrier prevents installation of firebrick in a manner that may block the cooling air vents. **DO NOT BLOCK THE COOLING AIR VENTS.** 

- 2) Repeat Step 1 for the opposite side of the See-Thru firebox
- 3) Starting and ending approximately 1/2" from the edge of the unit's sidewall, apply "split" firebrick to the side wall of the unit. Ensure approximately ¼" gap is kept between firebrick and damper beam/damper block assembly to allow for expansion.
- Repeat on opposite side wall

### IMPORTANT:

Ensure that the required holes for the Isoflames Linear burner's 3/8" gas supply line and pilot assembly gas and electrical connections are drilled prior to firebrick installation.


DO NOT COVER THESE AREAS WITH FIREBRICK!

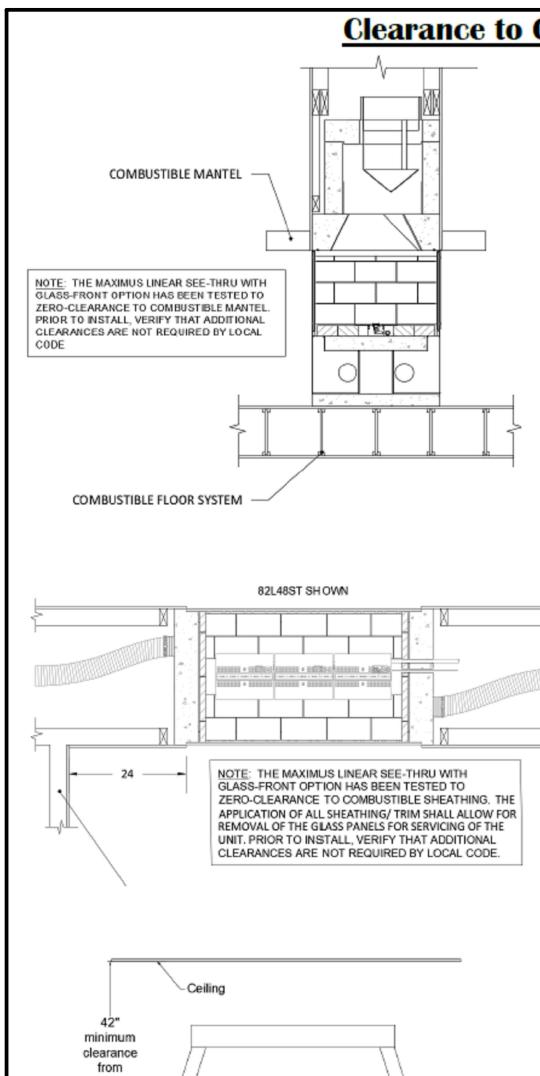

to ceiling

Combustible Floor System-

## Clearance to Combustible Trim

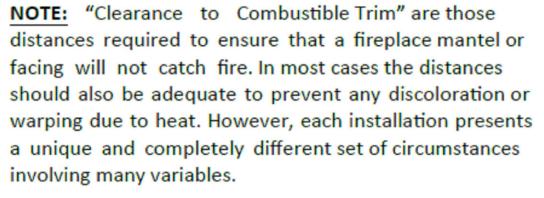

These variables include paint or finish composition, previous exposure to heat, methods and quality of construction, air flow patterns, etc. Because of these variables, the manufacturer does not guarantee that heat -warping or discoloration will never occur.

### MANTEL AND MANTEL SHELF CLEARANCES:

Maximus Linear with Glass Fronts units are designed to be installed so that the rough front face(s) of the Isokern firebox and sits flush with the face of the rough framing members that create the room wall finish.

The Maximus Linear with Glass Front has been tested to zero-clearance to combustible mantel and sheathing. The zero-clearance rating requires the glass panels to be installed during fireplace operation. Do not operate with the glass panels removed. Prior to installation, verify that additional clearances are not required by local code.

### ADJOINING WALLS:

It is recommended that adjoining room walls to the Isokern fireplace installation not be closer than twenty-four inches (24") to the finished fireplace opening.

### EILINGS:

sheathing may be installed at zero

clearance to Glass

removed after application of any

sheathing/finish

fireplace/burner.


materials for future servicing of the

Ensure Glass Panels

The minimum clearance from the top of the fireplace opening to a ceiling is forty-two inches (42").

#### ISOKERN SEE THRU LINEAR GAS FIREPLACE LISTED VENTED GAS FIREPLACE PER ANSI Z21.50 - 2019 LISTED VENTED GAS FIREPLACE PER ANSI Z21.50 - 2019 MADE IN THE USA CHESAPEAKE, VA 23323 NOT FOR USE WITH SOLID FUEL MODEL # □82L485T □82L7251 SERIAL NO: SL000001 ■82L96ST ■82L120ST FOR USE WITH PROPANE (LP) OR NATURAL GAS, SEE GAS IDENTIFYING TAG ON BURNER 82L48ST NATURAL GAS MAX BTU 54,000; PROPANE MAX BTU 48,000 82L72ST NATURAL GAS MAX BTU 90,000; PROPANE MAX BTU 80,000 82L96ST NATURAL GAS MAX BTU 108,000; PROPANE MAX BTU 96,000 82L120ST NATURAL GAS MAX BTU 110,000; PROPANE MAX BTU 105,000 \*See Burner Rating Plate For Additional Information MANIFOLD PRESSURE: PROPANE (LP): 10" WATER COLUMN: NATURAL GAS: 3.5" WATER COLUMN MINIMUM PERMISSIBLE GAS SUPPLY PRESSURE FOR PURPOSE OF INPUT ADJUSTMENT: ELECTRICAL RATING: SMOKE DOME FRONT = 0in **UNIT SIDES AND REAR** = 1.5in. COMBUSTIBLE SHEATHING ABOVE OPENING 60 HZ = 0inTOP SHEATHING OR TRIM TO OPENING SIDES = 0in120 VOLTS MANTEL ABOVE OPENING = 0in**LESS THAN 5 AMPS** This appliance must be installed in accordance with local codes, if any, if none, follow the current ANSI Z223.1/NFPA 54 or CSA B149.1 See Installation and Operating Instructions for this model and ICC # ESR - 4873

**EARTHCORE INDUSTRIES HEADQUARTERS** 

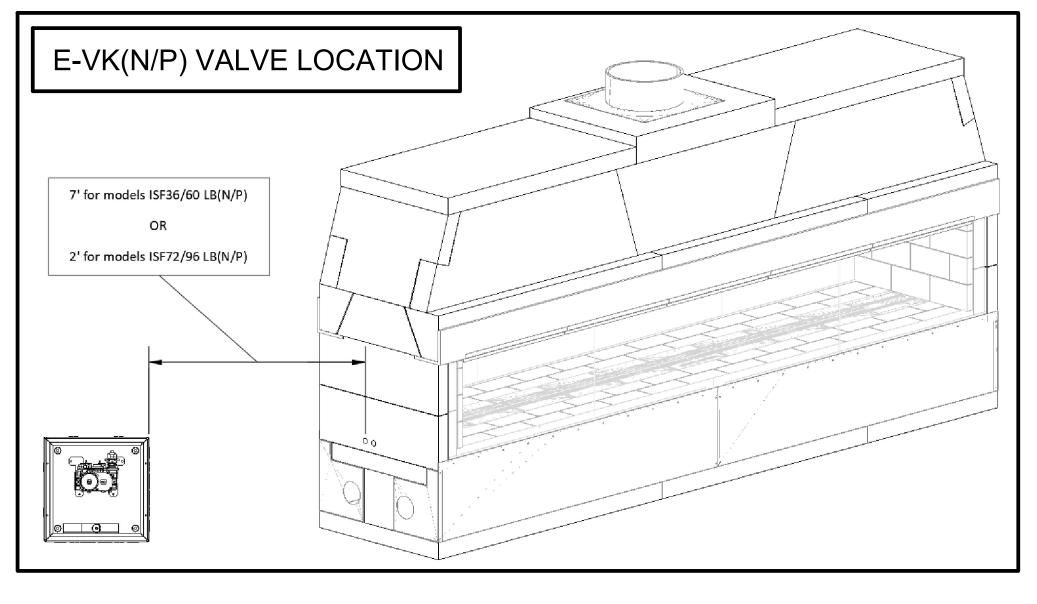

## SCAN QR CODE FOR LATEST INSTALLATION MANUALS



# Maximus Linear Series (Gas Only) Specifications

### MANUFACTURER:

ISOKERN Fireplace and Chimney Systems, North America distribution by Earthcore Industries, LLC, Jacksonville, Florida (Telephone 800-642-2920)

### PRODUCT DESCRIPTION:

Modular refractory masonry precast fireplace and chimney system.

- 1. Designed for field assembly as a fireplace and B-vent chimney system.
- 2. All interlocking parts necessary for assembly of a complete firebox, smoke dome, and Glass-Front Kit (Glass-Front Kit is installation option of the Maximus Linear series and is not required for all installations).
- 3. Isoflames Linear Burner and Valve system (per installation manual)
- 4. 12" B-vent chimney flue (per installation manual)
- 5. Mechanical draft system (per installation manual)

#### MATERIALS:

- A. Light weight concrete of a proprietary mixture of Icelandic volcanic aggregate and aluminum cement for precast firebox, chimney block and flue liner components.
  - 1. Compressive Strength: Firebox Block: 972 psi.
- B. Premixed (dry) EARTHCORE ADHESIVE.
  - 1. Tensile strength: 807 psi; Compressive strength: 2460 psi.
  - 2. Tested per ASTM C109, ASTM C307, and ANSI 118.4.
- C. Standard 1-1/8" high temperature refractory brick to line firebox interior walls.
- D. Standard 2-1/2" high temperature refractory brick to line firebox floor.

### INSTALLATION:

- A. Reference manufacturer's installation instructions for standard configurations, weights, sizes and installation details.
- B. Suitable masonry foundation or structural wood floor system must be provided.
- C. Non combustible hearth extensions must be provided.
- D. Unit to be assembled on site per manufacturer's illustrated instructions.
  - 1. Premixed EARTHCORE ADHESIVE is used at all joints between components
  - 2. Firebox to be lined with a minimum 1-1/8" rated firebrick on the walls and 2-1/2" rated firebrick on floor (trough created in firebrick floor for Isoflames Linear Burner installation).
  - 3. A 1-1/2" minimum clearance to combustible materials is required for firebox side and back-walls.
  - 4. A 3" minimum clearance to insulation required.
- E. Shall be installed only with the approved Isoflames Linear Burner and Valve System as detailed in the instruction manual.
- F. Installation must use 12" B-vent pipe as detailed in the instruction manual (Anchor Plate with Down-Draft Diverter required).
- G. Only approved mechanical draft systems shall be utilized, as detailed in the instruction manual.

### CERTIFICATION:

- A. PFS Corporation, PFS Report No. F19-161
- B. Meets or exceeds ANSI Z 21.50-2014, CSA 2.22-2014

### CODE COMPLIANCE:

A. ICC NO. ESR 4873

<u>NOTE</u>: Isokern components are a natural material and slight variations in dimensions may occur. These should be no more than 1/8".

### WEIGHTS AND LOAD CALCULATIONS

Total dead load amounts include (but are not necessarily limited to) the following items and their corresponding weight estimates as listed below:

- 1) Isokern Maximus Linear-See-Thru w/ Glass Front unit weights:
  - a) Maximus Linear See-Thru w/ Glass Front 48: 1,413 lbs. (no burner, flue, accessories)
- b) Maximus Linear See-Thru w/ Glass Front 72: 2,321 lbs. (includes steel angle; but no burner, flue, accessories)
- c) Maximus Linear See-Thru w/ Glass Front 96: 2,820 lbs. (includes steel angle; but no burner, flue, accessories)
- d) Maximus Linear See-Thru w/ Glass Front 120: 3,438 lbs. (includes steel angle; but no burner, flue, accessories)
- 2) Approximate weight of glass media: 100 lbs.
- 3) Fire brick and Adhesive: 350 lbs. 1800 lbs. depending on brick size and pattern
- 4) Facing material: per general contractor
- 5) B-Vent metal flue: per manufacturer and installation requirements

### The floor area for each model is as follows:

- Maximus Linear-See-Thru w/ Glass Front 48: @ 53" x 28" = 10.3 sq. ft.
- Maximus Linear-See-Thru w/ Glass Front 72: @ 85-3/4" x 28" = 16.67 sq. ft.
- Maximus Linear-See-Thru w/ Glass Front 96: @ 108-1/4" x 28" = 21.04 sq. ft.
- Maximus Linear-See-Thru w/ Glass Front 120: @ 131-3/4" x 28" = 25.62 sq. ft.

Earthcore is not responsible for structural floor support details for this fireplace system. Unless otherwise noted all floor framing drawings in this manual are merely illustrations to indicate the presence of an underlying floor system. Consult your local structural engineer for proper floor system design, sizing, and specifications.

